


5500 series manifold

5500-MAN-EX01-230VAC

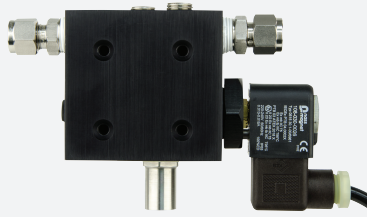

- Suitable for Zone 2/22
- ATEX & IECEx certifications
- Manifold combines the solenoid valve for purging and needle valve for pressurization in one housing
- Suitable for steel or plastic tubing
- Mounting hardware, pneumatic fittings and tubing included

5500 series manifold, ATEX/IECEx certified, 230 V AC



Function


The 5500-MAN-EX01-* combines a solenoid valve for purging and a needle valve for pressurization in one manifold design. When the valve is energized, the solenoid valve is open and allows for a high flow rate of protective gas into the enclosure. When the valve is deenergized, the flow through the internal needle valve is adjustable by a flathead screw driver through the needle stem on the manifold. The solenoid valve is used for purging, leakage compensation, and temperature control by signals from user defined points on the 5500 control unit. Mounting hardware includes 3/8" tube compression fittings mounted on the manifold for input and output flow, 3/8" tube compression bulkhead fitting for getting flow into the enclosure and certified sealing washers with bolts to mount the manifold to the enclosure. Also included is 1 meter of 3/8" poly tubing with 3/8" poly tube stiffener inserts which allows the connection of plastic tubing to compression fittings without collapsing the tubing.

The 5500-MAN-EX-01-* is certified for Zone applications. For NEC, Class/ Division applications see the model number key for proper manifold selection.

The 5500 valve system works with the 5500 control unit and EPV-5500 vents.

The 5500 system has ATEX and IECEx certification for Zone 2&22 installation.

Dimensions

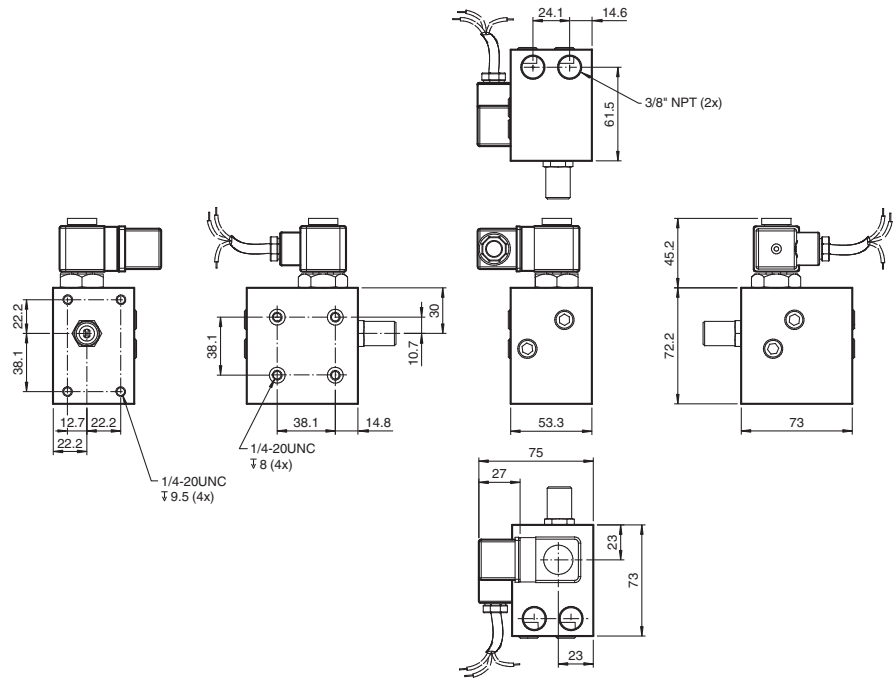

Technical Data


General specifications		
Operating mode		automatic purging
Series		5500
Hazardous environment		gas or dust
Supply		
Rated power		230 V AC: 7.2 VA, 60 Hz Voltage tolerance: +/- 10 %
Electrical specifications		
Fuse rating		80 mA (fuse rating on 5500 control unit)
Pneumatic parameters		
Protective gas supply		instrument grade air or inert gas
Pressure requirement		1.7 bar (25 psi) to 8.0 bar (115 psi)
Purge flow rate		solenoid valves : Cv (flow coefficient) = 1.4 needle valve : Cv (flow coefficient) = 0.24
Ambient conditions		
Ambient temperature		-20 ... 50 °C (-4 ... 122 °F)
Mechanical specifications		
Connection type		Pneumatic Input port: 3/8 inch Tube compression fitting Output port: 3/8" Tube compression fitting
Degree of protection		type 7 & 9

Release date: 2022-07-04 Date of issue: 2022-07-04 Filename: 70110803_eng.pdf

Technical Data

Material	Housing: anodized aluminum 3/8" compression fittings: 316 stainless steel Pressure ports: 3/8" NPTF Bulkhead fitting: 316 stainless steel Mounting bolts: 1/4 - 20, 316 stainless steel Sealing washers: UL recognized type 4X	
Mass		1250 g (2.8 lb)
Dimensions		see dimensions
Data for application in connection with hazardous areas		
EU-type examination certificate		
Marking		Ⓔ II 2 G Ex mb IIC T5 Gb Ⓔ II 2 D Ex mb tb IIIC T95C Db IP65 Protection by encapsulation PTB 03 ATEX 2018 X
Certificate		
Temperature class		T3C
International approvals		
IECEx approval		Ⓔ II 2 G Ex mb IIC T5 Gb Ⓔ II 2 D Ex mb tb IIIC T95C Db IP65 Protection by encapsulation IECEx PTB 04.0002X

Type Code

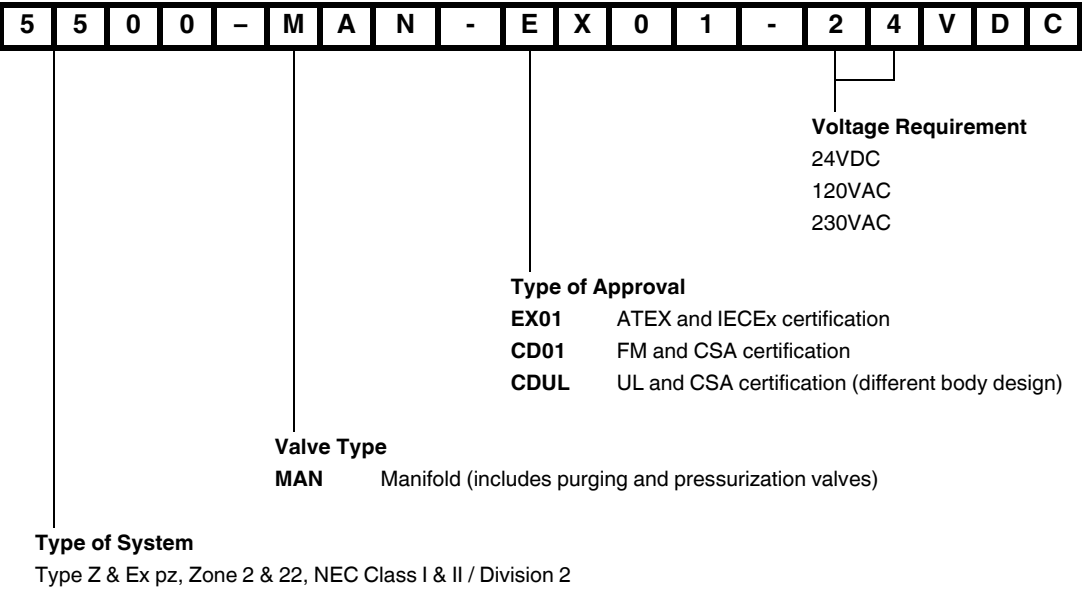

Release date: 2022-07-04 Date of issue: 2022-07-04 Filename: 70110803_eng.pdf